


Stick With a Proven Performer

For consistent application on larger jobs, stick with DuPont

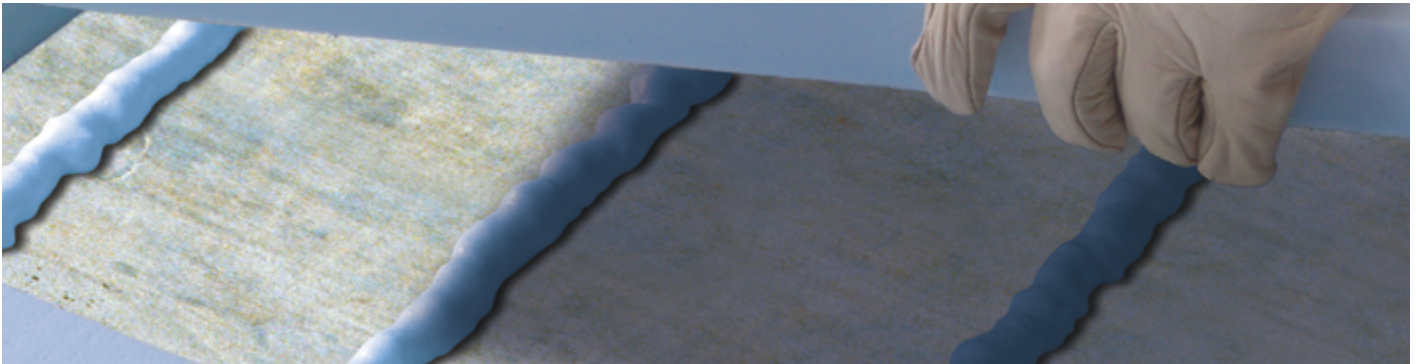

DuPont™ Insta Stik™ Quik Set Commercial Roofing Adhesive is a one-component, moisture-cured polyurethane adhesive for attaching compatible roof insulation boards to roof decks and substrates.

Because it is a single-component foam, Insta Stik™ Quik Set is always on ratio, reducing adhesion failure. It works well in a wide range of temperatures (33°F/1°C to 110°F/43°C), extending the practical working season and hours. And Insta Stik™ Quik Set is easy to apply, requiring no special application equipment or power sources.

Equipped for Jobs of all Sizes


Insta Stik™ Quik Set Complete is supplied in a 31 lb (13.6 kg) unit, 23 lb (10.4 kg) net chemical weight, with a flexible dispensing hose and wand assembly. An on/off ball valve at the end of the dispensing hose allows operational control for single-hand application. Insta Stik™ Quik Set Tank Only is supplied in a 31 lb (13.6 kg) unit, 23 lb (10.4 kg) net chemical weight, with no dispensing equipment.

Specifically designed for use on large, open roof areas with few penetrations, the Multi-Bead Applicator from DuPont offers contractors a rapid, labor-saving method of applying beads of Insta Stik™ Quik Set to roof decking in a correct and repeatable pattern. Featuring an improved design, the Multi-Bead Applicator holds three tanks of Insta Stik™ Quik Set and allows fast and efficient application of up to eight beads of adhesive.



WOOD

Insta Stik™ Quik Set Commercial Roofing Adhesive holds insulation securely without damaging the structural integrity of the wood deck. And no unsightly fastener points poke through the exposed underside of the deck.



CONCRETE

Without the noisy and tedious pre-drilling step required by mechanical fasteners, Insta Stik™ Quik Set helps speed up the installation process. Insta Stik™ Quik Set is compatible with expanded polystyrene (EPS), wood fiber board and other materials used on concrete decks.



METAL

Eliminate concerns associated with mechanical fastener penetrations (drilling through electrical conduit or the exposed underside of the deck, thermal bridging and environmental conditions).



Insta Stik™ Quik Set in the 30 lb tank is available with and without dispensing equipment.

DuPont™ Insta Stik™ Commercial Roofing Adhesive Advantages

- Maintains adhesion during freeze/thaw cycles
- Maintains characteristics even after freeze/thaw
- Prevents shifting of insulation boards in high wind conditions in loose-laid and ballasted applications
- Maximizes wind uplift resistance
- Low thermal conductivity
- No obnoxious odor, noise pollution
- No building height restrictions
- No puncturing of vapor retarders
- No asphalt penetration into building interior (steel deck)
- Clean, controlled application
- Longest shelf life in the industry (15 months)

Convenience and Versatility on Deck

Versatile Insta Stik™ Quik Set Commercial Roofing Adhesive can be used on wood, concrete or metal decks, insulation boards and other substrates for an efficient, economical solution to many roofing applications.

The Multi-Bead Applicator enables fast and efficient adhesive application.



**For more information visit
building.dupont.com
or call 1-866-583-2583**

NOTICE: No freedom from infringement of any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business. CAUTION: This product is combustible and shall only be used as specified by the local building code with respect to flame spread classification and to the use of a suitable thermal barrier. For more information, consult (Material) Safety Data Sheet ((M)SDS), call DuPont at 1-866-583-BLUE (2583), or contact your local building inspector. In an emergency, call 1-989-636-4400.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.

43-D100736-enNA-1219 CDP